


**luftgekühlt / air-cooled  
refroidissement par air / refrigerado por gas**


**TBi SR 9 P (AUT)**

AC: 95 A, 60%  
DC: 110 A, 60%  
ø 0,5 - 1,6 mm

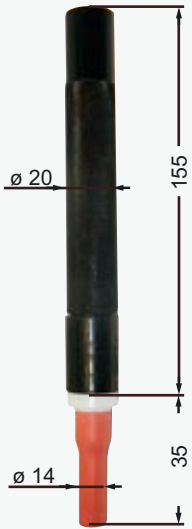


**TBi AUT 22 G**

AC: 125 A, 60%  
DC: 150 A, 60%  
ø 0,6 - 1,0 mm

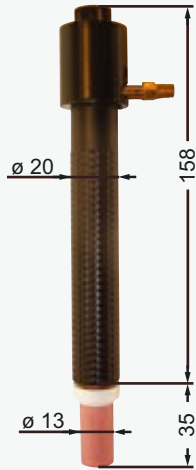


**TBi SR 26 P (AUT)**

AC: 200 A, 60%  
DC: 240 A, 60%  
ø 0,5 - 4,0 mm

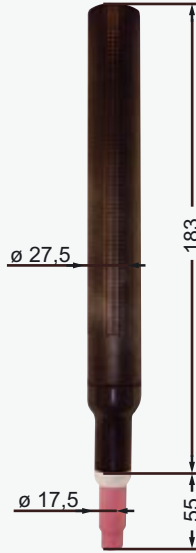

**TBi SR 18 P (AUT)**

AC: 240 A, 100%  
DC: 320 A, 100%  
ø 0,5 - 4,0 mm

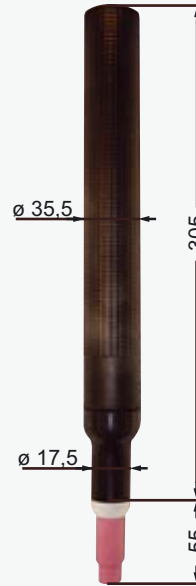

**TBi SR 20 P (AUT)**


AC: 200 A, 100%  
DC: 220 A, 100%  
ø 0,5 - 3,2 mm



**wassergekühlt / water-cooled / refroidissement par eau / refrigerado por agua**


**TBi SR 25 FX**

AC: 125 A, 100%  
DC: 140 A, 100%  
ø 0,5 - 3,2 mm

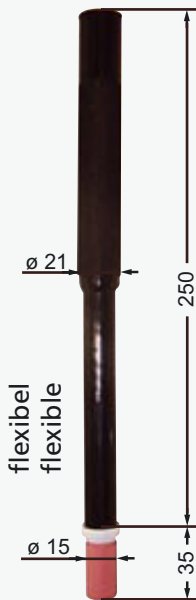


**TBi AUT 22 W**

AC: 125 A, 100%  
DC: 150 A, 100%  
ø 0,6 - 1,0 mm

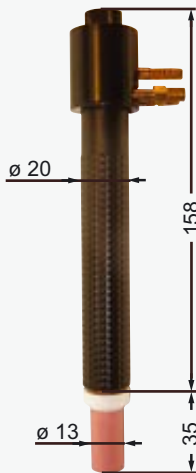


**TBi AUT 390**

AC: 350 A, 100%  
DC: 400 A, 100%  
ø 1,0 - 4,0 mm

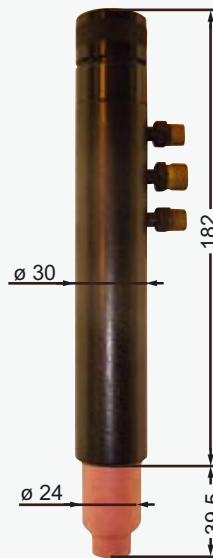


**TBi AUT 400S \*)**

AC: 350 A, 100%  
DC: 400 A, 100%  
ø 1,0 - 4,0 mm

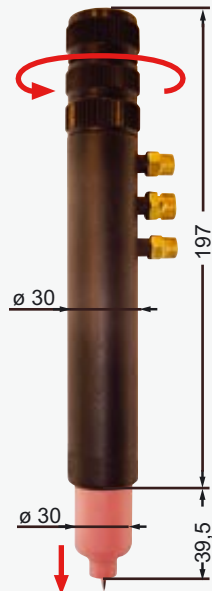

**TBi AUT 600S \*)**

AC: 500 A, 100%  
DC: 600 A, 100%  
ø 1,0 - 4,0 mm

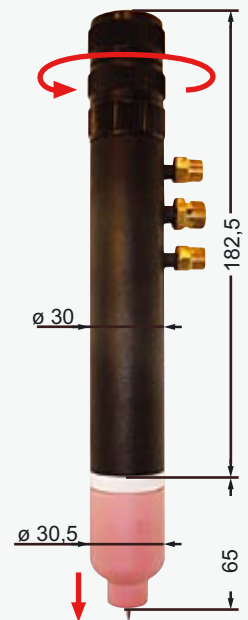

Die TBi AUT-Brenner sind auch für Roboteranwendung geeignet.  
The TBi AUT torches are also suitable for use with robots.  
Les torches TBi AUT s'adaptent aussi à l'application de robot.  
Las antorchas TBi AUT también se utilizan para las instalaciones robo

\*)): Elektrode im Betrieb nachstellbar  
Electrode can be lowered during operation  
Électrodes ajustables pendant l'opération  
Electrodo ajustable en altura incluso cuando la antorcha esta trabajando